



#

4**TRANSMITTAL LETTER**
(General - Patent Pending)Docket No.
11585-US

In Re Application of:

Marcel DeGRANDPRE et al

Serial No.
09/885,062Filing Date
21-June-2001

Examiner

Group Art Unit
2661

Title:

STANDBY REDUNDANCY IN IMA

TO THE ASSISTANT COMMISSIONER FOR PATENTS:

Transmitted herewith is:

Certified copy of priority document - British Patent Application No. 0015589.5

in the above identified application.

- ☒ No additional fee is required.
- ☐ A check in the amount of _____ is attached.
- ☐ The Assistant Commissioner is hereby authorized to charge and credit Deposit Account No. _____ as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____
- ☐ Credit any overpayment.
- ☐ Charge any additional fee required.



Signature

Dated: 11-September-2001

Richard J. MITCHELL 34,519


MARKS & CLERK
P.O. Box 957
Station B
Ottawa, Ontario
K1P 5S7
Tel: (613) 236-9561

I certify that this document and fee is being deposited on _____ with the U.S. Postal Service as first class mail under 37 C.F.R. 1.8 and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Signature of Person Mailing Correspondence

Typed or Printed Name of Person Mailing Correspondence

CC:



THIS PAGE BLANK (USPTO)



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1985 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., p.l.c.y, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 26 June 2001

THIS PAGE BLANK (USP 10)

Patents Form 1/77

Patents Act 1977
(Rule 16)

26 JUN 2000

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

RL.P51223GB

2. Patent application number

(The Patent Office will fill in this part)

26 JUN 2000

0015589.5

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Mitel Corporation
P.O. Box 13089
350 Legget Drive
Kanata, Ontario
Canada
K2K 2W7

27JUN00 E548014-6 D03312
P01/7700 0.00-0015589.5

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

CANADA

607630006

4. Title of the invention

STANDBY REDUNDANCY IN IMA

5. Name of your agent (if you have one)

Marks & Clerk

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Marks & Clerk
4220 Nash Court
Oxford Business Park South
Oxford
OX4 2RU

Patents ADP number (if you know it)

727 1125 001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
See note (d))

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form (none)

Description 6 ✓

Claim(s) 3 ✓

Abstract 1 ✓

Drawing(s) 2 ONLY *SW*

10. If you are also filing any of the following, state how many against each item.

Priority documents (none)

Translations of priority documents (none)

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1 ✓

Request for substantive examination (Patents Form 10/77) (none)

Any other documents (please specify) (none)

11. I/We request the grant of a patent on the basis of this application.

Signature *Marks & Clerk*
Marks & Clerk

Date
26 June 2000

12. Name and daytime telephone number of person to contact in the United Kingdom Dr. Robert Lind 01865 397900

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Standby Redundancy in IMA

Field of the Invention

This invention relates to ATM networks, and in particular to a method of providing redundancy in an interface providing inverse multiplexing services (IMA).

5 Background of the Invention

Inverse multiplexing is a system wherein cells from a high speed link are transmitted over a plurality of lower speeds links, and re-assembled at the far end into a high speed stream. A problem arises when the links become defective. The IMA protocol, through the Link Addition Slow Recovery procedure, partly addresses recovery from errors by
10 adding/deleting links to/from an IMA group, but does not address the problem that arises when the IMA device fails.

While redundancy has been implemented in the prior art, it requires additional external circuitry and additional software for monitoring and performing the switch over. This process requires significant amount of time resulting in slow recovery from a faulty
15 condition.

An object of the invention is to address this problem.

Summary of the Invention

According to the present invention there is provided an interface apparatus comprising first and second devices, each having a series of ports for connection to a common packet
20 transfer bus associated with a controller, said devices operating in parallel and being configured so that when one is in an active mode the other is in a warm stand-by mode ready to become active in the event of failure of the active device, said ports of the device in the active mode communicating normally with said controller to initiate transfer of said packets over said packet transfer bus, and said ports of said device in the standby mode
25 being inoperative to communicate with said controller to initiate packet transfer or to transfer packets onto said packet transfer bus, but otherwise operating normally so as to be ready for immediate activation in the event of failure of said active device.

The packet transfer bus is typically an ATM Utopia bus connected to an ATM controller. The devices are typically inverse multiplexer devices connected between a Utopia bus and a TDM bus.

Thus in accordance with the invention, two IMA devices are used in parallel, one in
5 active mode and the other one in "warm" standby mode. The recovery time is improved and the process is simplified by using the warm standby mode.

A unique technical aspect of the present invention is the use of a Utopia interface in a new manner where an IMA device operates from the information available on the Utopia bus but does not respond to it. The IMA device, which is configured in standby, does not
10 respond (drive) the bus as the active IMA device responds to the various conditions. The two IMA devices operate in parallel but the device in standby mode does not drive the TX TDM bus or the Utopia ports. This is done without the need of any additional external glue logic that would otherwise be required.

The standby mode should be implemented on-chip in the Utopia port so that the ATM
15 controller does not need to broadcast the ATM cells on two independent Utopia buses (or waste time to reconfiguring the whole IMA group(s) on another device). If the TX TDM port is not configured in high impedance mode, then an external TDM switch would be required to interface to the TDM device.

Each device can have additional ports operating normally, in which case the standby and
20 active modes really apply to the port rather than the devices, but for convenience one device will be referred to throughout as the standby device and the other as the active device.

The invention therefore further provides an interface apparatus comprising a series of ports for connection to a ~~common~~ packet transfer bus associated with a controller, at least
25 some of said ports being in an active mode and at least some of said ports being in a standby mode, said ports in the active and standby modes operating in parallel and being configured so that when one is in an active mode a corresponding standby port in a warm stand-by mode ready to become active in the event of failure of the active port, said ports in the active mode communicating normally with said controller to initiate transfer of said
30 packets over said packet transfer bus, and said ports in the standby mode being

inoperative to communicate with said controller to initiate packet transfer or to transfer packets onto said packet transfer bus, but otherwise operating normally so as to be ready for immediate activation in the event of failure of the corresponding active port.

5 The invention still further provides a method of providing redundancy in an interface apparatus for transferring data to and from a high speed packet transfer bus associated with a controller, comprising providing a series of ports for connection to the common packet transfer bus, configuring a redundant port operating in standby mode for each active port, configuring said active ports to communicate normally with said controller to initiate transfer of said packets over said packet transfer bus, and configuring said standby
10 ports to be inoperative to communicate with said controller to initiate packet transfer or to transfer packets onto said bus, but otherwise to operate normally so as to be ready for immediate activation in the event of failure of a corresponding active port.

Brief Description of the Drawings

The invention will now be described in more detail, by way of example only, with
15 reference to the accompanying drawings, in which:-

Figure 1 is a block diagram of an IMA interface device in accordance with the principles of the invention for transferring data from an ATM controller to multiple physical devices; and

Figure 2 is a block diagram of an IMA interface device for transferring data from multiple
20 physical devices to an ATM controller.

Detailed Description of the Preferred Embodiments

The interface devices shown in Figures 1 and 2 are connected between a common Utopia bus 1 carrying high speed ATM cells and a common TDM bus 2 carrying TDM links onto which cells from the Utopia bus are inverse multiplexed in accordance with the IMA
25 standard. Figures 1 and 2 shows portions of the device for carrying cells in opposite directions. The common Utopia bus includes signal lines and data lines for byte by byte transfer as is known in the art. Figure 1 shows single TX signal line 13. Figure 2 shows signal lines 10, 11, and data lines 12, typically eight bits wide.

The universal test and operations physical interface for ATM (UTOPIA) provides a standard linking ATM with the physical subsystems layer. It defines the link between the physical layer (PHY) and upper layer modules such as the ATM layer and various management entities. The sub-systems may be part of an ATM network interface card (NIC), an ATM switch or an ATM router.

The implementation of the warm standby mode is realized by modifying the operation of the Utopia Interface 3 and the TX TDM interface 4 in such a way that two IMA devices 5, 6 are connected to the common Utopia bus 1 and to the common TDM devices 4 (e.g. framers) but respond differently. One device 6 (or port) is in active mode and the other device 5 (or port) is in standby mode). The internal response of the two devices is identical, but the stand-by device does not send out data onto the TDM bus or Utopia bus.

The two IMA devices 5, 6 are configured identically. They have the same port addresses and same mode of operation. The same software is used to update their operational state at the same time. The active device is operating as normal and responds to the Utopia requests and drives the TX TDM Interface. The IMA device 5 in standby mode operates internally as if it were in normal mode except that it does not drive the TX TDM ports 7 and the Utopia output pins 8.

The TX (transmit) TDM output pins 7 are configured in high impedance mode. The TX Utopia port does not respond to polling and port selection but accepts cells from the Utopia port. The RX (Receive) Utopia port does not respond to polling and port selection but processes cells in the same manner as if it were active. The output pins on the Utopia ports are kept in high impedance mode. The internal cell recovery process of the device 5 in standby mode operates normally but the cell is never transferred to the Utopia controller.

Because the two devices receive and process the same information in parallel, the recovery time, when an error occurs, is reduced to a minimum. There are some ATM cells that are lost due to the time to detect the error condition and the time required to switch the active device to standby mode and the other device from standby to active mode and because the two devices are not synchronized. However, this is a major improvement as compared to re-starting a group using a backup device.

The standby mode is applicable to the entire device (i.e. all the links and groups, in non-IMA mode and in IMA mode) and is programmed through a register under the control of the software (user).

Part of the IMA protocol is implemented in software and it is the responsibility of the software to operate the two devices in parallel. The main task is to ensure that the configuration and operational parameters are the same in both devices.

The configuration parameters are determined during the initialization phase and when a link is added or deleted from an operational IMA group. There are no time critical operations when an IMA group is configured or dismantled (shut off).

The additional operational task is mainly to ensure that the content of the TX ICP cells is identical on the two devices. During normal operation, only the active device is accessed to retrieve the operating parameters. All incoming information from the device in standby mode can be ignored and the IRQ masked. The additional software overhead during normal operation is reduced to writing the content of the TX ICP cell to both devices.

Upon detection of errors, when required, the control software changes the mode of operation of the two devices and resumes its operation using the device that was in standby mode.

A software routine can be used to configure a device in standby mode to reflect the state of an active device in the case where the standby device is configured after the active device was configured. (In the case where a faulty device is replaced by a good standby device).

The active/standby modes can be implemented on a per port basis or per device basis, in a case of a multi-port device. In the case of a multi-port device only one device should be operated in standby mode and another device in active mode. This simplifies the management of the IMA groups.

Consider now the situation shown in Figure 1, where ATM cells are transferred from the Utopia bus 1 to the TDM bus 2. The Utopia ATM controller (not shown) interrogates via TX signal line 13 the ports 8 on the IMA devices to see if they are ready to accept data. The ports 8 of the active device are kept in the normal mode and respond according to whether or not they are ready to accept data. The ports 8 of the standby device are

maintained in the high state so that they never indicate they are ready to accept data.

When the ports 8 of the active device indicate that they are ready to accept data, the Utopia controller transfers cells over the data bus (not shown in Figure 1). These cells are received by both devices, i.e. the devices in both the active and standby modes, and the received cells are internally process in an identical manner in both IMA devices, so that the state of the two IMA devices is always the same. The output ports on the standby device are also disabled so that the standby device does not output cells onto the TDM links.

In the reverse direction shown in Figure 2, the cells are continually received by ports 7 of both active and standby devices from the TDM bus 2 in parallel and processed internally in exactly the same way. On the input side there is no difference between the two active and standby devices. On the output side, the ports 8 communicate with Utopia ATM controller over signal lines 10, 11. The output pins of the ports 8 of the standby device are kept in a high impedance state. For the active device the pins operate normally to communicate with the Utopia ATM controller in order to transfer cells over the Utopia bus 1. The internal operations of the ports of the same, but in the standby device the cells are not actually transferred to the Utopia bus to avoid contention.

It is possible to implement the standby mode on a per port basis where only some of the Utopia and TDM ports are on a standby mode inside a device and other ports are in standby mode in another device.

Similar standby mode may be used in any other device that is connected to a Utopia bus.

Claims:

1. An interface apparatus comprising first and second devices, each having a series of ports for connection to a common packet transfer bus associated with a controller, said devices operating in parallel and being configured so that when one is in an active mode the other is in a warm stand-by mode ready to become active in the event of failure of the active device, said ports of the device in the active mode communicating normally with said controller to initiate transfer of said packets over said packet transfer bus, and said ports of said device in the standby mode being inoperative to communicate with said controller to initiate packet transfer or to transfer packets onto said packet transfer bus, but otherwise operating normally so as to be ready for immediate activation in the event of failure of said active device.
2. An interface apparatus as claimed in claim 1, wherein said ports of said device in the standby mode are operative to receive from the common packet transfer bus packets whose transfer is initiated in response to a communication between the controller and the ports of the active device.
3. An interface apparatus as claimed in claim 2, wherein said common packet transfer bus is a Utopia bus transferring ATM cells.
4. An interface apparatus as claimed in claim 3, wherein devices also include a second set of ports connected to a common time division multiplexed (TDM) bus.
5. An interface apparatus as claimed in claim 4, wherein said second set of ports of both the standby and active devices are configured in the receive direction to be in the active state so that data are received in parallel by both said devices from the TDM bus.
6. An interface apparatus as claimed in claim 5, wherein output pins of said second set of ports of the standby device are configured in ~~the transmit~~ direction to be in the inactive state so that data from said output pins are ~~not transmitted~~ onto the TDM bus.
7. An interface apparatus as claimed in claim 6, wherein said devices are inverse multiplexers transferring cells between said Utopia bus and a plurality of TDM links forming said TDM bus.

8. An interface apparatus as claimed in claim 7, wherein at least one of said standby and active devices have additional ports operating normally.

9. An interface apparatus comprising a series of ports for connection to a common packet transfer bus associated with a controller, at least some of said ports being in an active mode and at least some of said ports being in a standby mode, said ports in the active and standby modes operating in parallel and being configured so that when one is in an active mode a corresponding standby port in a warm stand-by mode ready to become active in the event of failure of the active port, said ports in the active mode communicating normally with said controller to initiate transfer of said packets over said packet transfer bus, and said ports in the standby mode being inoperative to communicate with said controller to initiate packet transfer or to transfer packets onto said packet transfer bus, but otherwise operating normally so as to be ready for immediate activation in the event of failure of the corresponding active port.

10. An interface apparatus as claimed in claim 9, wherein said ports in the standby mode are operative to receive from the common packet transfer bus packets whose transfer is initiated in response to a communication between the controller and the ports in the active mode.

11. An interface apparatus as claimed in claim 10, wherein said common packet transfer bus is a Utopia bus transferring ATM cells.

12. An interface apparatus as claimed in claim 11, wherein devices also include a second set of ports connected to a common time division multiplexed (TDM) bus.

13. A method of providing redundancy in an interface apparatus for transferring data to and from a high speed packet transfer bus associated with a controller, comprising providing a series of ports for connection to the common packet transfer bus, configuring a redundant port operating in standby mode for each active port, configuring said active ports to communicate normally with said controller to initiate transfer of said packets over said packet transfer bus, and configuring said standby ports to be inoperative to communicate with said controller to initiate packet transfer or to transfer packets onto said bus, but otherwise to operate normally so as to be ready for immediate activation in the event of failure of a corresponding active port.

14. A method as claimed in claim 13, wherein said standby ports receive from the common packet transfer bus packets whose transfer is initiated in response to a communication between the controller and the active ports.
15. A method as claimed in claim 14, wherein said common packet transfer bus is a Utopia bus transferring ATM cells.
16. A method as claimed in claim 15, wherein a second set of ports transfer data to and from a common time division multiplexed (TDM) bus.
17. A method as claimed in claim 17, wherein the second set of ports of both the standby and active devices in the receive direction are in the active state so that data are received in parallel by both said devices from the TDM bus.
18. A method as claimed in claim 17, wherein output pins of said second set of standby ports in the transmit direction are in the inactive state so that data from output pins thereof are not transmitted onto the TDM bus.
19. A method as claimed in claim 17, wherein the standby ports are located on a first device in the standby mode and the active ports are located on a second device in the active mode.

Abstract of the Disclosure

An interface apparatus includes first and second devices, each having a series of ports for connection to a common packet transfer bus associated with a controller. The devices operate in parallel and are configured so that when one is in an active mode the other is in a warm stand-by mode ready to become active in the event of failure of the active device. 5 The ports of the device in the active mode communicate normally with the controller to initiate transfer of the packets over the packet transfer bus. The ports of the device in the standby mode are inoperative to communicate with the controller to initiate packet transfer, but otherwise operate normally so as to be ready for immediate activation in the 10 event of failure of the device in the active mode.

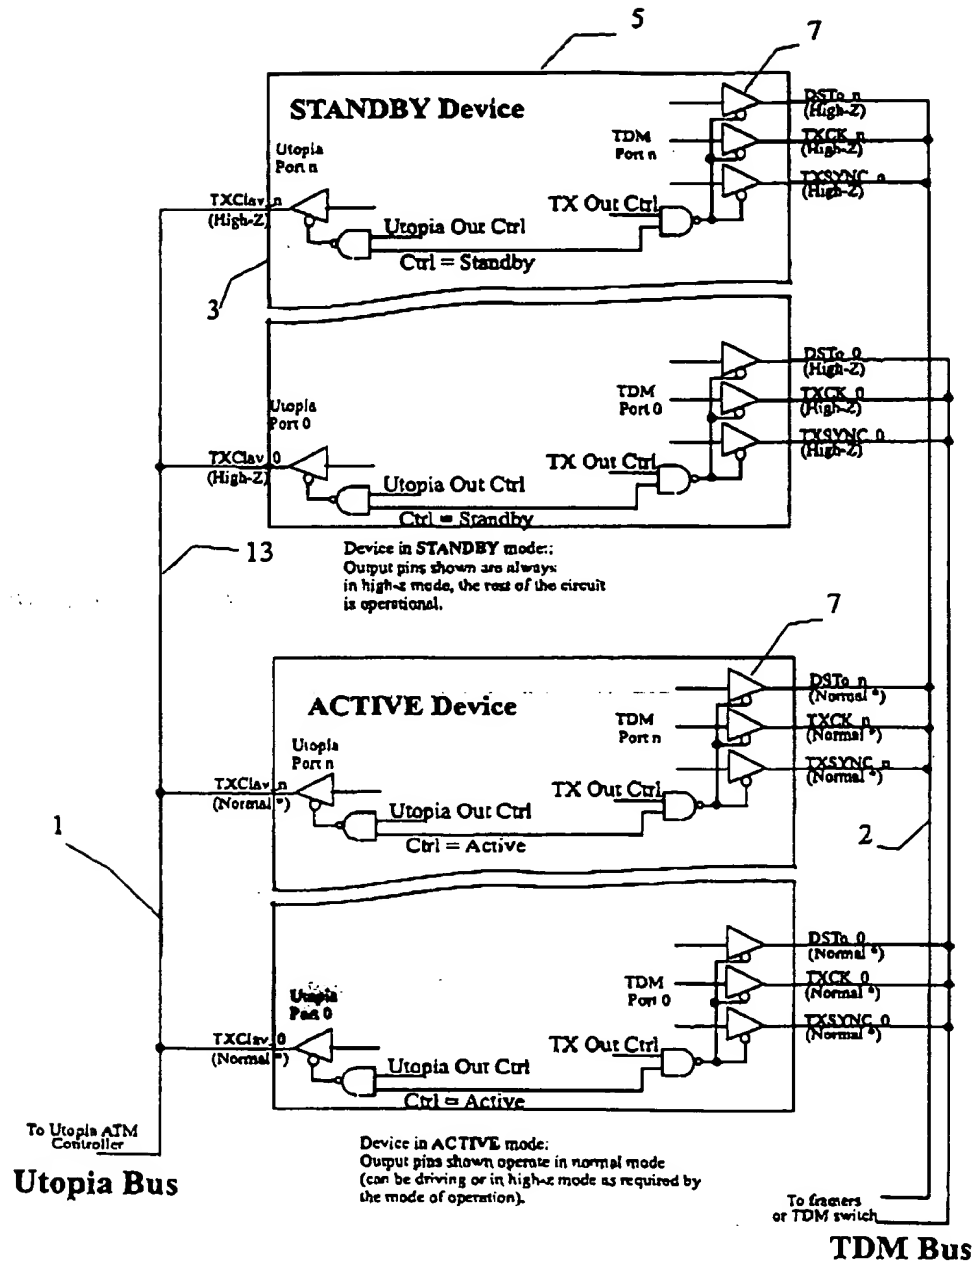
**ATM Controller to MPHY Devices**

Fig. 1

THIS PAGE BLANK (USPTO)

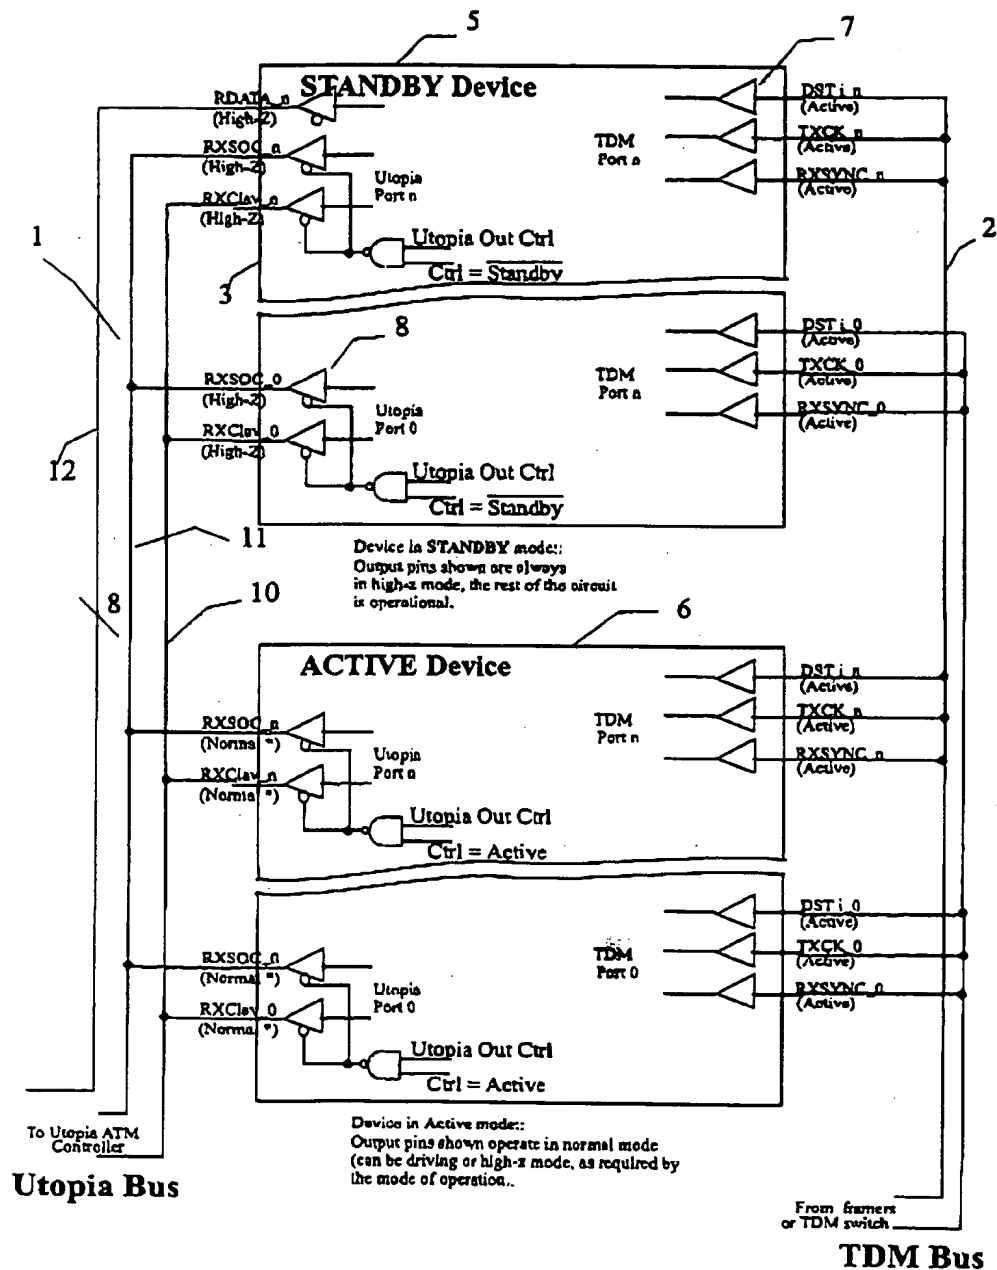
**MPHY Devices to ATM Controller**

Fig. 2

THIS PAGE BLANK (USPTO)
